

DURA
LAMP

SLIMFLUX Q4

SLIMFLUX Q4 PANEL



UGR<13
PF 0,9

35W
4500lm
4000K

35W
4100lm
3000K **new**

PLUS

DIMENSIONS:
59,5 x 59,5 x 2,3 CM

COLOUR
TEMPERATURE:
3000K - 4000K

LIFETIME:
50000H L70 B20

WARRANTY:
5 YEARS/24H

1

TYPE

LED panel with dedicated modular micro optics for precise light distribution and total glare control.

2


CHARACTERISTIC

The peculiar shape of each reflector, together with the set back source positioning, allow for precise control of the light emission and the reduction of glare, obtaining UGR<13. PF 0,9; necessary in systems over 6KW: efficiency of consumption and no need for PF compensation.

3

MICROSPOT OPTICS

The effect on the work surface is that of a 'microspot': accent lighting from an essentially 'dark' ceiling. Q4 creates a relaxing, glare-free environment while achieving good localised illuminance levels.



Slimfl



DURA
LAMP

SLIMFLUX Q4 is the perfect panel to achieve excellent illuminance levels and keep the ceiling appearance almost 'off'. The position and structure of the lenses create a very low glare value - UGR>13, technically defined as 'imperceptible' - ensuring an environment with maximum visual comfort. Indispensable in spaces where video terminals are used, the aesthetic and comfort due to the ceiling without the large blocks of light of common LED panels, makes this fixture suitable for installation in receptions, banks, offices, executive offices, long-stay areas, meeting rooms etc..

4 **INSTALLATION OPTIONS**

Recessed in false ceilings
Recessed in plasterboard (with spring accessory)
Suspended (with adjustable cables accessory)
Surface mounted with direct ceiling mount (with surface mount accessory)
Surface mounted with spacer frames (choose the frame with the preferred thickness)

5 **MATERIALE**

Corpo in metallo verniciato bianco.

6 **NOTA BENE**

Remote driver included. Low thickness installation space!

UX Q4




H

DIMMABILITY AND STANDBY EMERGENCY LIGHTING

SLIMFLUX Q4, like other SLIMFLUX, can be made dimmable by replacing the driver included with the dimmable driver code DELT40D-M. It can also be modified for emergency backup stand-by lighting by adding the code KTEMR03, which includes a 3-hour battery pack.

SLIMFLUX Q4

PLUS	220-240V 50/60Hz	Ra>80	50000h L70 B20	IP20 VI IP43 VO	UGR<13		-25° +35°C		G5/ h24	Risk Group 1
-------------	---------------------	-------	-------------------	--------------------	--------	--	---------------	--	------------	-----------------

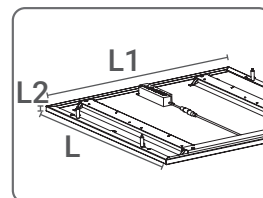


art.	W	lm	K	PF	cd		L	L1	L2		8011905	
LP6060WWQ4	35	4100	3000	0,9	5000	60°	595	595	23	3000	967697	5
LP6060NWQ4	35	4500	4000	0,9	5000	60°	595	595	23	3000	861957	5

DIMMABILITY: SLIMFLUX panels can be used with multi-current dimming power supply, code DELT40D-M.
STANDBY LIGHTING: SLIMFLUX panels can be used with standby emergency kit, code KTEMR03.


SLIMFLUX 60X60 Q4 ACCESSORIES

SLIMFLUX 60X60 Q4 LED panels accessories for recessed, surface or suspension installation.

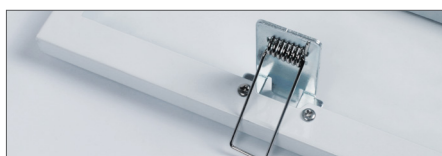

Metal springs kit for recessed installation - 4 pieces

art	L	L1	
KTLPQ4-MS	55	26	1



Cables kit for suspension installation

art	L	
KTLPQ4-SP	1500	1




Panel thickness only 15 mm



Surface installation kit

art	L	L1	L2	
KTLPQ4-SM	565	565	14.6	1

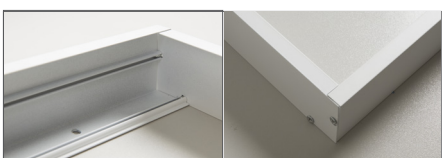

Self assembly kit Basic model for 60x60 panels

art	L	L1	L2	
LPLAFO603	600	600	50	1
LPLAFO604	600	600	80	1



Safety wire and junction box

art	L	
LP-SSK	1200	1

Junction box for connection to the mains, prepared for connection in cascade, equipped with safety suspension kit with steel cable for installations in seismic zones.

For the photometrics and .ldt files please see the web site.