



## MINI T5


### Typology

Compact, circular and linear fluorescent lamps.

### Features

The best fluorescent and triphosphorous powders for maximum light colour control and light emission over time, good colour rendering and the excellent luminous efficiency.

A wide reliable range for installation in professional contexts such and home environments.



### Characteristic data

Power	13 W	Dimmable	Yes	Input	94 Vac	Base	G5
IP	20	Flux	610 lm	Tc	6100 K	Ra	>75

### Dimensional characteristics



L	517 mm
Ø	16 mm


## Lighting and photometric features

Flux	610 lm
CCT nominal colour temperature	6100 K
Colour of the light	Cool light
Colour rendering index	>75
Lifespan	10000 h
Mercury	3 mg
Luminous Flux Maintenance at 2000h	90
Luminous Flux Maintenance at 4000h	82
Luminous Flux Maintenance at 6000h	75
Luminous Flux Maintenance at 8000h	70
Luminous Flux Maintenance at 12000h	66
Luminous Flux Maintenance at 16000h	65
Lamp survival factor at 2000h	100
Lamp survival factor at 4000h	95
Lamp survival factor at 6000h	50

## Electrical characteristics

Rated power	13 W
Input voltage	94 Vac
Frequency	50 Hz
Dimmable	Yes
Input current	0.163 A
Operating temperature	-15°C / +35°C
Operating position	360°

## Spectrometry

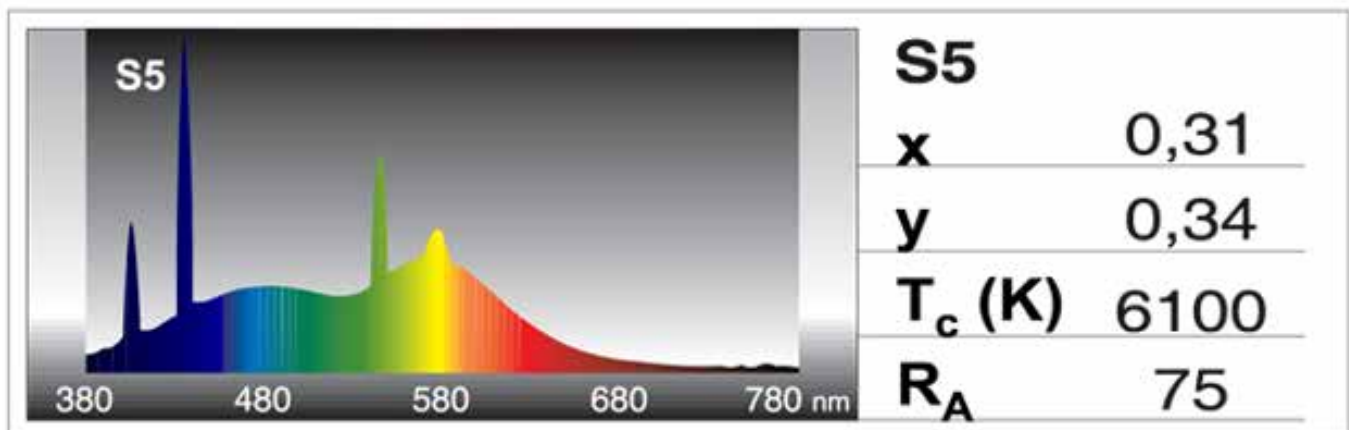

## Standards and Directives

2009/125/EC, 245/2009, 347/2010, 1194/2012, 2015/1428, 2010/30/EU, 874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU, 2014/35/EU, 2015/863	CEI EN 61000-3-2:2019
CEI EN 55015:2020	CEI EN 61000-3-3:2014
CEI EN 60968:2016	CEI EN 61547:2010

## Logistics data

Item net weight	50 gr
Barcode single item	8011905017996
Number of pieces multiple pack	10
Barcode multiple pack	8011905717490